This Page Is Inserted by IFW Operations and is not a part of the Official Record

BEST AVAILABLE IMAGES


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents will not correct images, please do not report the images to the Image Problem Mailbox.

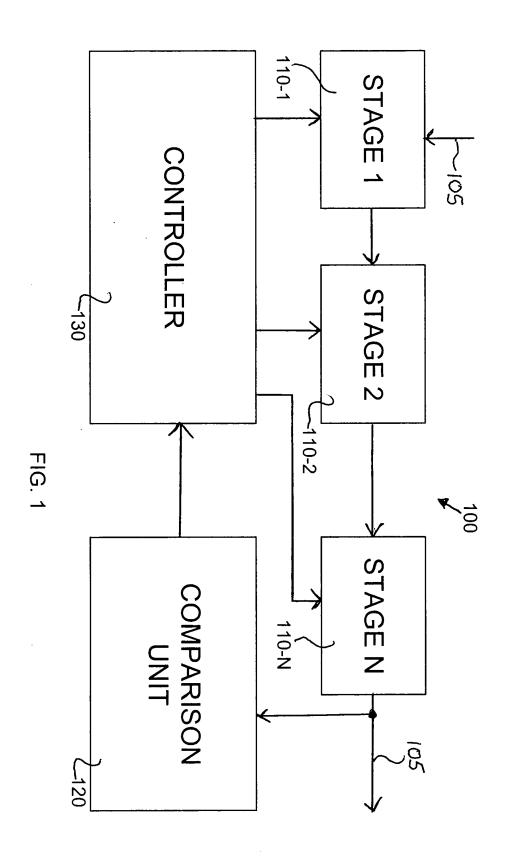




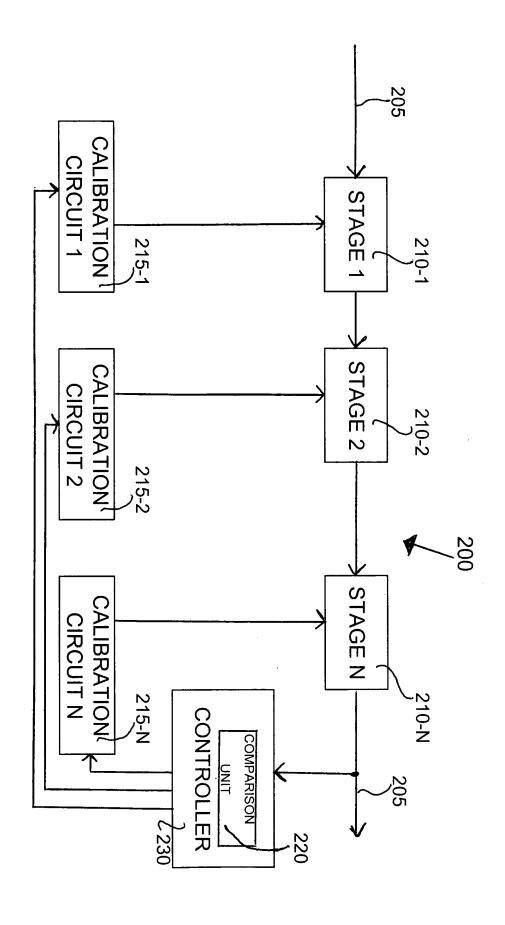


FIG. 2

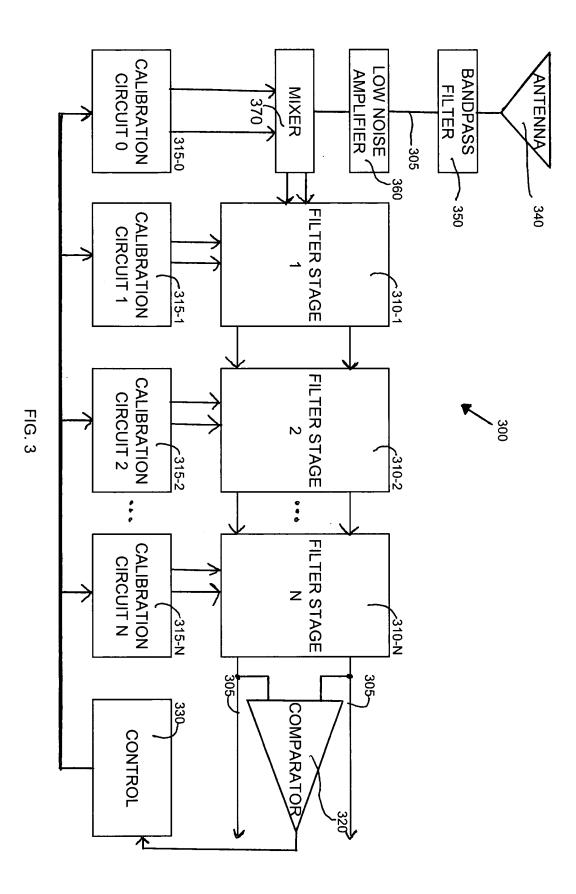

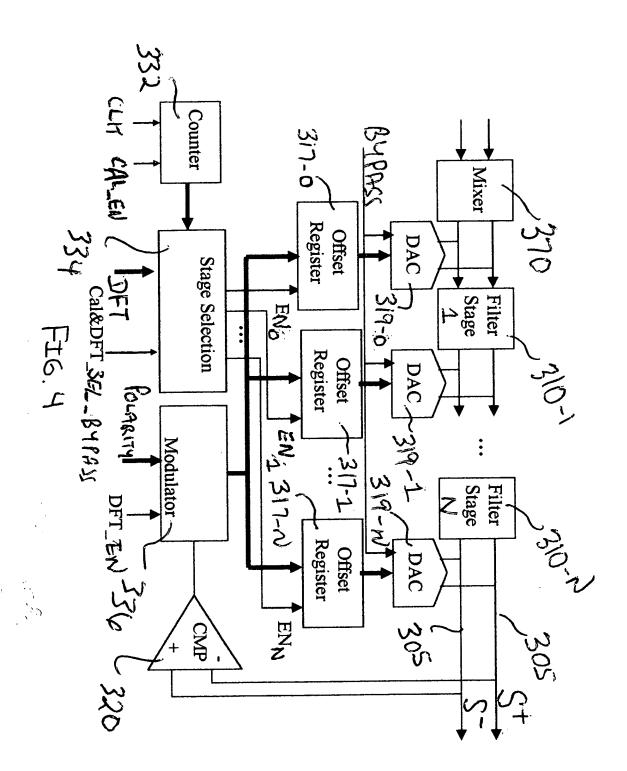

estant and

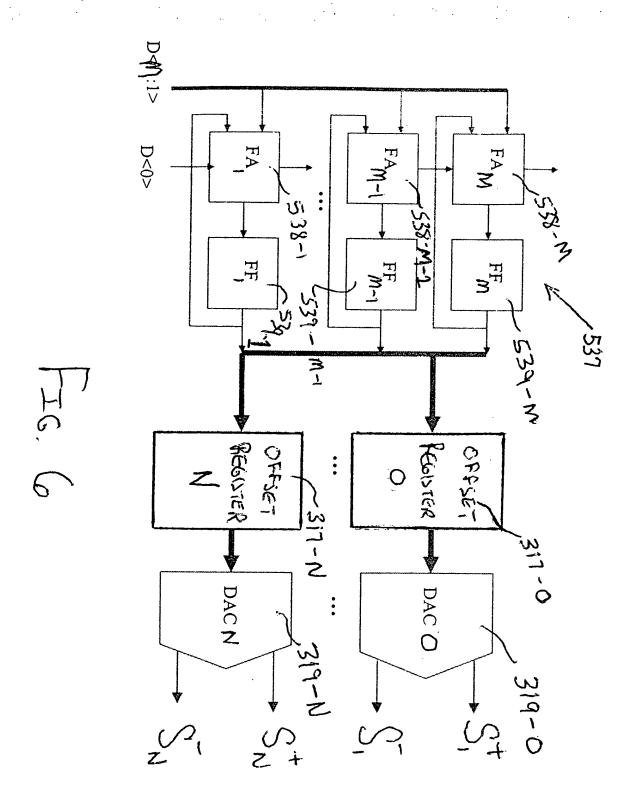

Z-1 S 639 637

EVALUATE A RECEIVED SIGNAL FROM AN OUTPUT OF A FINAL STAGE OF MULTIPLE STAGES IN A RECEIVER CHANNEL USING A SINGLE COMPARISON UNIT.

- 810

SELECTIVELY CONTROL THE
CALIBRATION OF EACH STAGE
OF THE MULTIPLE STAGES
BASED ON AN OUTPUT FROM
THE SINGLE COMPARISON UNIT.

-820

FIG. 8

